

Type: SMPA-Fuse

AC Motor Start and Run Capacitors - Fuse Protection

馬達啟動電容器 - 保安型 (P2)

Type: SMPA-FuseCoil

AC Motor Start and Run Capacitors - Fuse Protection with Coil

馬達啟動電容器 - 保安型加線圈 (P2)



保安型
Fuse Protection



保安型加線圈
Fuse Protection with Coil



Features 特性

- Long life due to self-healing characteristic.
- High moisture resistance.
- Film functional as fuse, prevent capacitors to be damaged by surge voltage.
- Active and passive flame retardant (UL94 V-0).
- Capacitor and inductor integrated, save more space.
- 具自愈性、壽命長。
- 密封性良好、耐濕性高。
- 薄膜具保險絲功能，防止遭遇突波電壓時電容毀損。
- 絕佳的阻燃防火功能 (UL94 V-0)
- 電容與電感整合，節省空間。

Applications 用途

AC Motor Start and Run Capacitors are widely used for electric motors starting or running such as air conditioner, refrigerator, washing machine, dishwasher, motor pump, bread maker, fan, electrical power tool, power supply, UPS, etc.

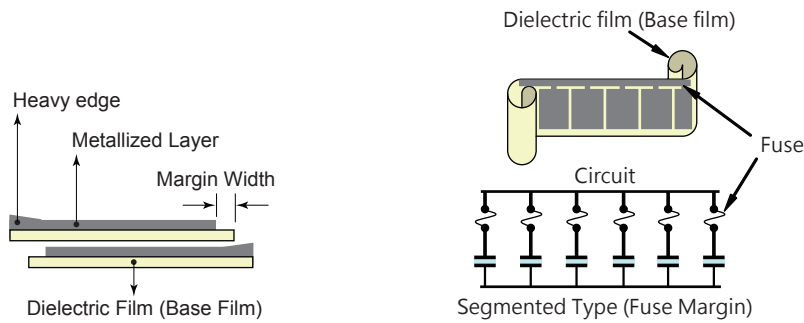
適用於家電產品馬達啟動及馬達運轉用途，例如室內空調、電冰箱、洗乾衣機、洗碗機、馬達幫浦、製麵包機、風扇、電動工具、電源供應器、不斷電系統等各類電子產品。

Specifications 規格

Rated Voltage 額定電壓	125 ~ 460VAC
Capacitance Range 電容量範圍	0.01 ~ 74µF
Capacitance Tolerance 容量誤差	±5% (J), +10-5% (U), ±10% (K), ±20% (M)
Temperature Range 溫度範圍	-25 ~ +70°C / 85°C, -40 ~ +85°C / 100°C
Rated Working Frequency Range 電壓頻率	50 ~ 60Hz
Dissipation Factor (DF) 損耗因數	≤ 1% Max. Measured at 1kHz 20°C
Between Terminals (T-T) 端子相互間耐電壓	Rated voltage x 175% VAC 10sec
Between Terminals and Case (T-C) 端子 Case 間耐電壓	2000VAC, 60sec




















Metallized Polypropylene Film Capacitors

金屬化聚丙烯薄膜電容器



Film cross sectional view

Model and Type 外型圖

Type Model	BX	BL	BF	BP	BU	RO	Terminals
A							Tinned copper wire Tinned copper clad steel wire
B							UL AWG18 to AWG22 Insulated stranded wire
C							AMP110F1 or AMP187F1 Single fast-on terminal
D							AMP187F2 Single fast-on terminal
E							AMP187U2 Dual Fast-on Terminals
F							AMP205F1 or AMP250F1 Single Fast-on Terminals
G							AMP187L2, AMP205L2 or AMP250L2 Dual Fast-on Terminals
H							AMP250U2 Dual Fast-on Terminals
I							AMP250F1 or AMP250L2 Single/Dual Fast-on Terminals
J							AMP187F1, AMP187U2, AMP250F1 or AMP250U2 Single/Dual Fast-on Terminals

Fast-on Terminals Dimensions 端子尺寸

Type	110	187	205	250	±Tolerance
D	2.80	4.75	5.25	6.35	0.25
B	7.50	6.35	7.00	8.00	0.50
E	5.30	3.50	4.00	4.00	0.20
C	0.50	0.50	0.80	0.80	0.05
ØF	1.25	1.35	1.65	1.65	0.05

(Unit: mm)

